

APPLICATION

- Maintains the fire rating of a 2 hour floor ceiling assembly
- Designed for interior applications

FEATURES

- Flush aluminum diamond plate cover
- Warnock Hersey International 2 hour fire rating
- Tested to NFPA 288 ; ASTM E 119

SPECIFICATIONS

MATERIAL: Aluminum door & top frame ; Stainless steel bottom frame, hinges & hardware

DOOR: 1/4" aluminum diamond plate reinforced for live load of 150 lb/per sq. ft.


FRAME: 3" x 3" x 1/4" aluminum top frame with thermal break 3 1/2" x 2" x 11 gauge stainless steel bottom frame

INSULATION: Two - 1" thick layers of ceramic blanket insulation attached to bottom frame

HINGE: Type 316 stainless steel continuous piano hinge

OPENING DEVICE: Door panel opens to 90 degrees. Automatic hold open arm with red vinyl grip keeps door in open position to ensure safe egress. Stainless steel compression springs provide lift assistance. U.L. listed 165 degrees fusible link is provided for automatic closing and latching in the event of smoke or fire.

LATCH: Stainless steel slam latch assembly with interior release

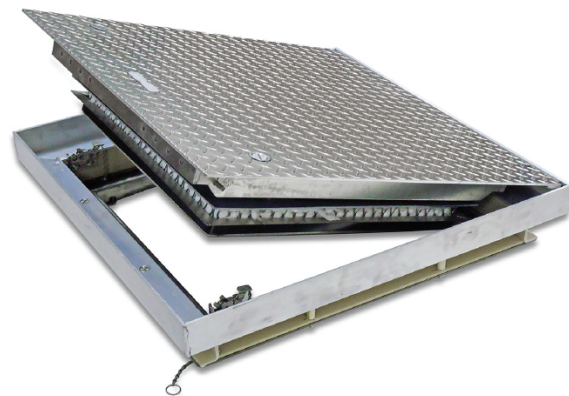


DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

STANDARD SIZES:



DOOR SIZE W x H INCHES (MM)	WEIGHT LBS KG
24 x 24 (610 x 610)	80 36
24 x 36 (610 x 914)	140 63
24 x 48 (610 x 1219)	160 73
30 x 30 (762 x 762)	130 59
30 x 36 (762 x 914)	160 73
36 x 36 (914 x 914)	190 86
36 x 48 (914 x 1219)	240 109
42 x 42 (1067 x 1067)	250 113
48 x 48 (1219 x 1219)	280 127

For detailed specifications see submittal sheet

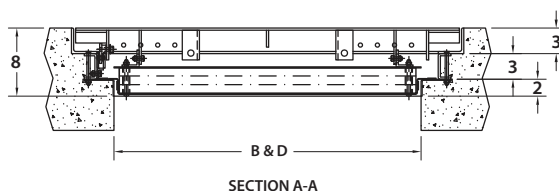

NOTES:

- MATERIAL: ALUMINUM & ST. STEEL
- LOADING: 150 LBS. PER SQ. FT.
- 316 STAINLESS STEEL NUTS & BOLTS
- CERTIFIED 2-HOUR FIRE RATING

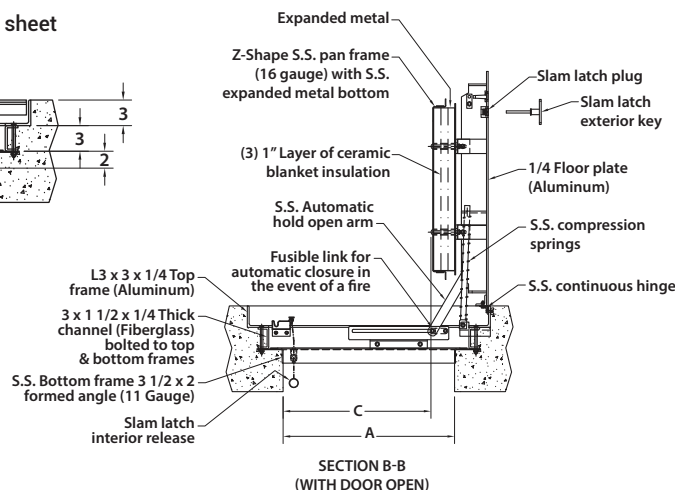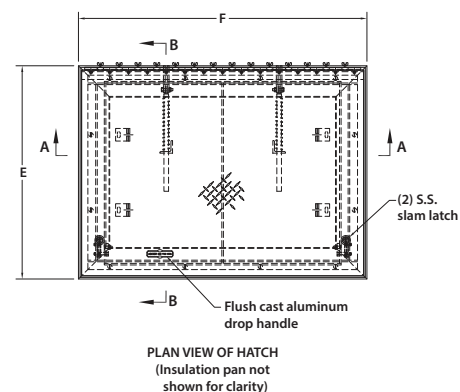

Proprietary property of Acudor Products, Inc., sold and distributed with proper authorization



For a complete list of options visit
www.AcudorAccessPanels.com

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

Scan  or  Click



To view Pricing and
Additional Product Info.

TELEPHONE:
1-888-622-8367
FAX:
1-888-626-2907



PO BOX 4668
PMB 76520
NEW YORK,
NEW YORK 10163-4668
US




WEBSITE:
www.AcudorAccessPanels.com
E-MAIL:
info@AcudorAccessPanels.com

FRFD

FIRE RATED FLOOR DOOR

NOMINAL DOOR SIZE	FRAME OPENING		CLEAR OPENING		OVERALL SIZE		WEIGHT
in. (mm)	A in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)	E in. (mm)	F in. (mm)	LBS. (KG)
24 x 24 (610 x 610)	24 (610)	24 (610)	20 (508)	24 (610)	34 (864)	34 (864)	80 (36)
24 x 36 (610 x 914)	24 (610)	36 (914)	20 (508)	36 (914)	34 (864)	46 (1168)	140 (63)
24 x 48 (610 x 1219)	24 (610)	48 (1219)	20 (508)	48 (1219)	34 (864)	58 (1321)	160 (73)
30 x 30 (762 x 762)	30 (762)	30 (762)	26 (660)	30 (762)	40 (1016)	40 (1016)	130 (59)
30 x 36 (762 x 762)	30 (762)	36 (914)	26 (660)	36 (914)	40 (1016)	46 (1168)	160 (73)
36 x 36 (914 x 914)	36 (914)	36 (914)	32 (813)	36 (914)	46 (1168)	46 (1168)	190 (86)
36 x 48 (914 x 1219)	36 (914)	48 (1219)	32 (813)	48 (1219)	46 (1168)	58 (1473)	240 (109)
42 x 42 (1067 x 1067)	42 (1067)	42 (1067)	38 (965)	42 (1067)	52 (1321)	52 (1321)	250 (113)
48 x 48 (1219 x 1219)	48 (1219)	48 (1219)	44 (1118)	48 (1219)	58 (1473)	58 (1473)	280 (127)

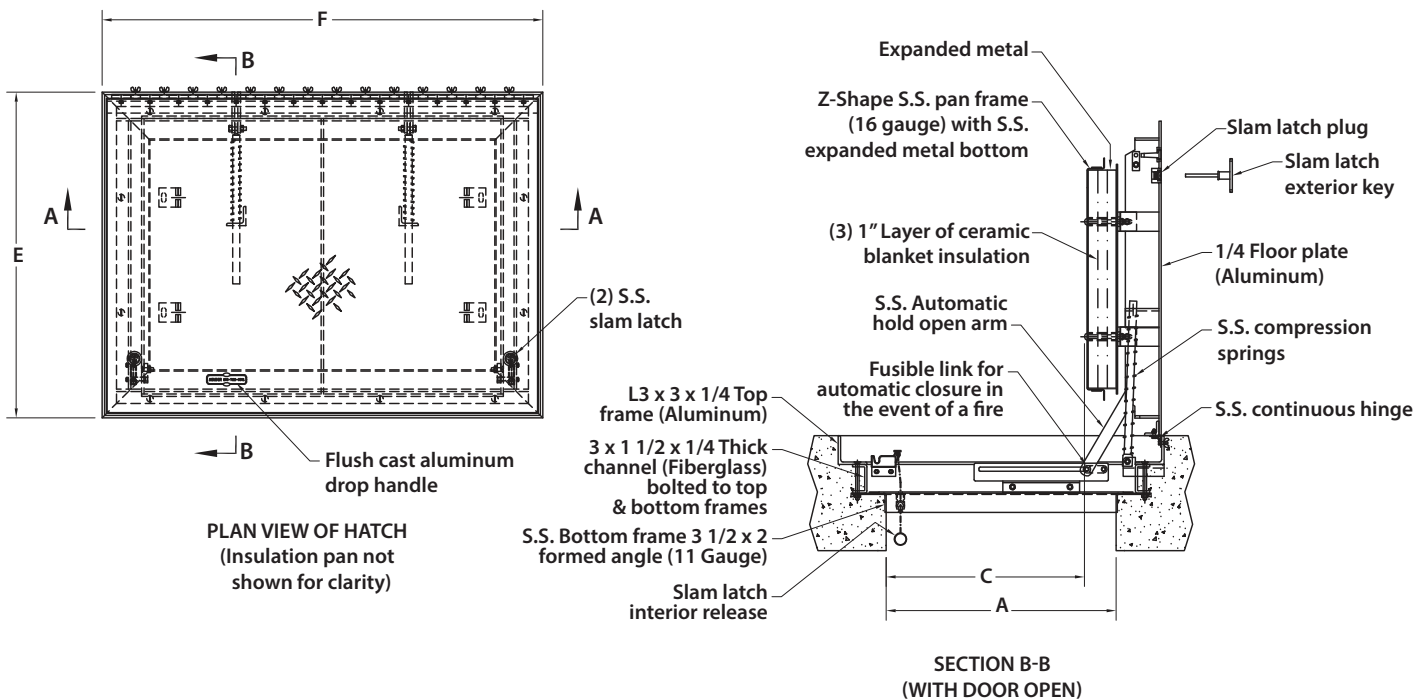

- NOTES:
- MATERIAL: ALUMINUM & ST. STEEL
 - LOADING: 150 LBS. PER SQ. FT.
 - 316 STAINLESS STEEL NUTS & BOLTS
 - CERTIFIED 2-HOUR FIRE RATING

