

APPLICATION

- For installation in drywall walls requiring concealing of the door panel consistent to surroundings
- For use in walls, fire-rated for up to 90-minutes with a temperature rise of max 250°C (450°F) over 30 minutes

FEATURES

- Recessed reinforced door fitted with 5/8" Fire-rated drywall.
- Concealed hinge & self-centering device ensures seamless appearance in walls
- Self-closing & self-latching door mechanism
- Perforated Frame ensures trouble-free application of skim coat to edge of the door
- Zinc coated steel provides superior corrosion resistance
- Testing standards UL 10(b) and ULC S104

SPECIFICATIONS

DOOR: Steel-22 Gauge recessed fitted with 5/8" thick drywall suitable to accept skim coat finish on site.

DOOR FRAME: Steel-22 Gauge press bent for strength and rigidity with pre-punched flanges for convenient mounting and accepting skim coat finish on site

HINGE: Concealed

FIRE RATING (WALLS): Meets 1½ hour fire rating requirement in accordance with UL 10(b) and CAN/ULC S104-10 for max size upto 24" x 36"

LATCH: Self-latching bolt, operated by flush key

FINISH: Satin coat steel



DIMENSIONS AND APPEARANCE




>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

STANDARD SIZES:

| DOOR SIZE W x H INCHES (MM) | LATCHES | WEIGHT | |
|--------------------------------|---------|--------|------|
| | | LBS | KG |
| 12 x 12 (305 x 305) | 1 | 10.0 | 4.50 |
| 16 x 16 (406 x 406) | 1 | 14.0 | 6.40 |
| 18 x 18 (457 x 457) | 1 | 18.0 | 8.20 |
| 24 x 24 (610 x 610) | 2 | 29.0 | 13.1 |
| 26 x 36 (610 x 914) | 2 | 42.0 | 19.0 |

Wall opening is W + 3/8" (9 mm)

For detailed specifications see submittal sheet

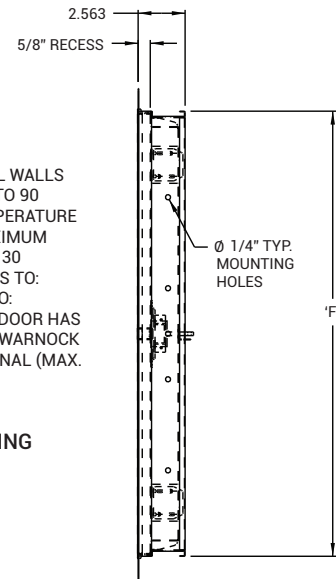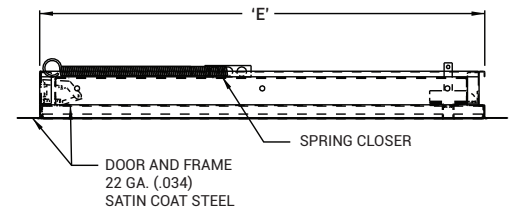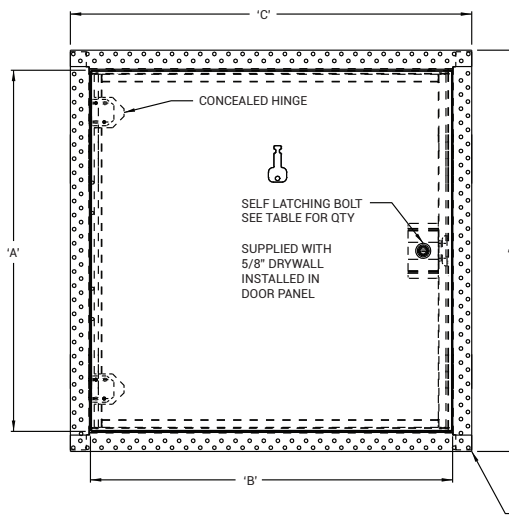

VERTICAL WALLS

FOR USE IN VERTICAL WALLS
FIRE RATED FOR UP TO 90 MINUTES WITH TEMPERATURE RISE RATING OF MAXIMUM 250° C (450° F) OVER 30 MINUTES. CONFORMS TO: UL10(B) CERTIFIED TO: CAN/ULC S104 THIS DOOR HAS BEEN APPROVED BY WARNOCK HERSEY INTERNATIONAL (MAX. SIZE 24" X 36")

PATENT PENDING

Proprietary property of Acudor Products, Inc., sold and distributed with proper authorization

PROJECT DATA

Custom Sizes Available - Fast!

| PROJECT NAME : | QTY | W | H | OPTIONS |
|------------------------|--|---|---|---------|
| ARCHITECT : | | | | |
| DEALER : | | | | |
| CONTRACTOR : | | | | |
| LOCATION : | SPECIAL INSTRUCTIONS : | | | |
| DATE : | | | | |
| TAGGING INSTRUCTIONS : | SUBMITTAL APPROVAL : (signature or stamp) | | | |



For a complete list of options visit www.AcudorAccessPanels.com

Scan or Click



To view Pricing and Additional Product Info.

TELEPHONE:
1-888-622-8367
FAX:
1-888-626-2907

PO BOX 4668
PMB 76520
NEW YORK,
NEW YORK 10163-4668
US




WEBSITE:
www.AcudorAccessPanels.com
E-MAIL:
info@AcudorAccessPanels.com

FW-5015

RECESSED FOR DRYWALL

| NOMINAL DOOR SIZE | A | B | C | D | E | F | LOCK |
|---------------------|-------------|-------------|-------------|-------------|-------------|-------------|------|
| Inches (mm) | | | | | | | |
| 12 x 12 (305 x 305) | 11.83 (300) | 11.89 (302) | 14.48 (368) | 14.48 (368) | 12.04 (306) | 12.04 (306) | 1 |
| 14 x 14 (356 x 356) | 13.83 (351) | 13.89 (353) | 16.48 (419) | 16.48 (419) | 14.04 (357) | 14.04 (357) | 1 |
| 16 x 16 (406 x 406) | 15.83 (402) | 15.89 (404) | 18.48 (469) | 18.48 (469) | 16.04 (407) | 16.04 (407) | 1 |
| 18 x 18 (457 x 457) | 17.83 (453) | 17.89 (454) | 20.48 (520) | 20.48 (520) | 18.04 (458) | 18.04 (458) | 1 |
| 24 x 24 (610 x 610) | 23.83 (605) | 23.89 (607) | 26.48 (673) | 26.48 (673) | 24.04 (611) | 24.04 (611) | 2 |
| 24 x 36 (610 x 914) | 35.83 (910) | 23.89 (607) | 26.48 (673) | 38.48 (977) | 24.04 (611) | 36.04 (915) | 2 |

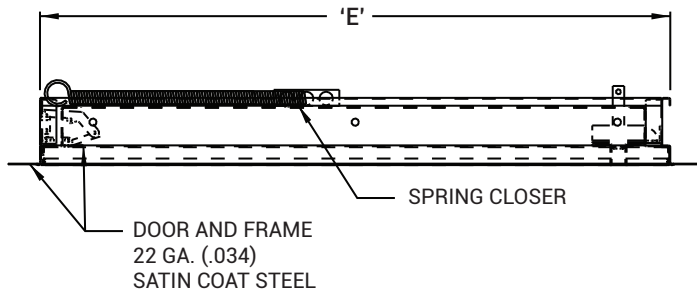

VERTICAL WALLS

FOR USE IN VERTICAL WALLS FIRE RATED FOR UP TO 90 MINUTES WITH TEMPERATURE RISE RATING OF MAXIMUM 250° C (450° F) OVER 30 MINUTES.
CONFORMS TO: UL10(B) CERTIFIED TO: CAN/ULC S104
THIS DOOR HAS BEEN APPROVED BY WARNOCK HERSEY INTERNATIONAL (MAX. SIZE 24" x 36")

