

APPLICATION

Glass fiber reinforced gypsum, ceiling access doors are designed to blend seamlessly into drywall ceilings. The hinged feature allows this door to be installed in walls.

FEATURES

- European Angle Hinges
- Tapered edge for joint tape
- Easily textured
- Lightweight
- No cracking or shrinkage
- Mold and moisture resistant

SPECIFICATIONS

- Shell Thickness = .125" .375"
- Fastener Test Pull Out (wood stud) = 525 lb. avg.
- Fastener Test Pull Out (metal stud) = 525 lb. avg.
- Fastener Push Through Test = 350 lb. avg.
- Fuel Contribution (ASTM-E84-80) = 0
- Flame Spread (ASTM-E84-80) = 0
- Smoke Index (ASTM-E84-80) = 0
- Combustion (ASTM-E84-80) = 0

SKU: **GFRG-SH**

GLASS FIBER REINFORCED GYPSUM SQUARE CORNER

HINGED




DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

DOOR SIZE W x H INCHES (MM)	CEILING OPENING INCHES (MM)	WEIGHT	
		LBS	KG
9 x 9 (229 x 229)	15 x 15 (381 x 381)	6.00	2.73
12 x 12 (305 x 305)	18 x 18 (457 x 457)	9.00	4.09
16 x 16 (406 x 406)	22 x 22 (559 x 559)	10.0	4.53
18 x 18 (457 x 457)	24 x 24 (610 x 610)	11.0	5.00
24 x 24 (610 x 610)	30 x 30 (762 x 762)	16.0	7.27

For detailed specifications see submittal sheet

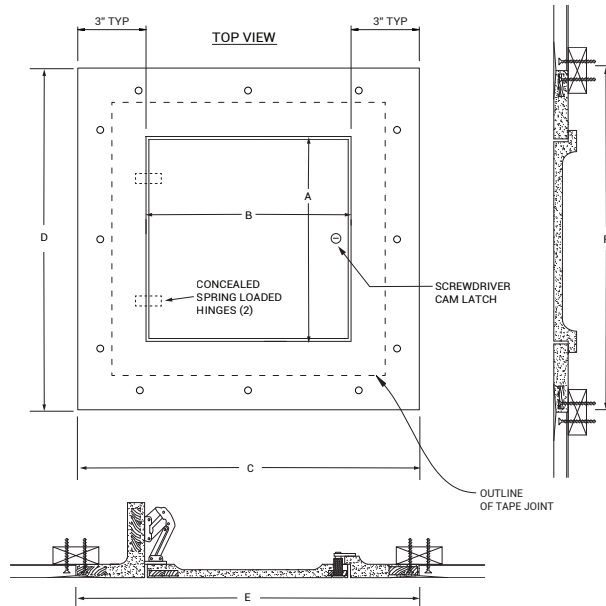

For a complete list of options visit
www.AcudorAccessPanels.com

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

Scan  or  Click



To view Pricing and
Additional Product Info.

TELEPHONE:
1-888-622-8367
FAX:
1-888-626-2907



PO BOX 4668
PMB 76520
NEW YORK,
NEW YORK 10163-4668
US



WEBSITE:
www.AcudorAccessPanels.com
E-MAIL:
info@AcudorAccessPanels.com

SQUARE CORNER HINGED ACCESS PANEL

TOP VIEW

3" TYP

3" TYP

D

A

B

C

CONCEALED SPRING LOADED HINGES (2)

SCREWDRIVER CAM LATCH

OUTLINE OF TAPE JOINT

F

E

ACUDOR

The drawing illustrates the ACUDOR door assembly. The top view shows a rectangular door with a central panel of width B and height A. The door is secured by two concealed spring-loaded hinges and a screwdriver cam latch. Dimensions include 3 inches typical for the side margins, D for the total height, C for the total width, and E for the side profile length. The side view shows the door's profile with a height of F. The ACUDOR logo is in the bottom right corner.